





To insure accuracy, please go to the “**Corrections and Errata**” menu option on our web site: [www.fisllc.com](http://www.fisllc.com) to see if any corrections/additions have been made since this pattern was printed. Your feedback is always appreciated too!

## Make the Accent Blocks


- 1) Using a ¼” seam allowance, sew the **4-Patch Fabric A** and **4-Patch Fabric B** 1½” x wof strips together lengthwise. Repeat by sewing the **4-Patch Fabric C** and **4-Patch Fabric D** 1½” x wof strips together likewise. [Number of strip sets needed: TR =2, WH = 1]



- 2) Cross cut each of the strips into 1½” segments. [Cut: TR = 36, WH = 16]

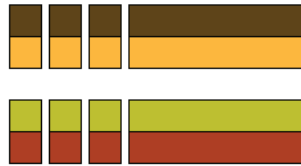


- 3) Using a ¼” seam allowance, join an A&B segment to a C&D segment as shown. [Make TR=36, WH = 16]  
**Important: “Square up” the resulting squares to 2½”.**



- 4) Lay a **Alternate Fabric** 2½” x wof strip(s) with its right side facing up, place a 4-Patch unit along the right side with A&B segment on the left and C&D on the right.

Fold the 4-Patch unit on top of the 2½” strip so that right sides are facing together. Pin to secure. Leave an approximate ¼” gap below the 4-Patch unit and continue with the needed number of 4-Patch units. Sew a ¼” seam down the right side. [Make: TR=18, WH=8]

Press open the 4-Patch units attached to the strip, and trim 2½” sections trimming flush to the 4-Patch.

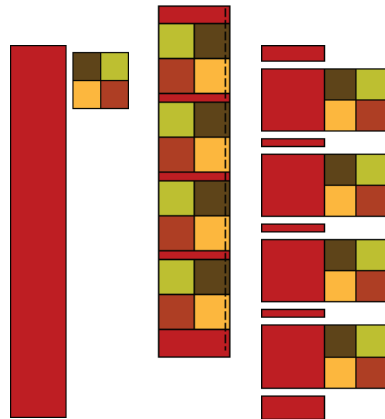

- 25) Using the (4) remaining **Main Fabric** 3” x wof strips, attach the top & bottom borders then attach the Side Borders.

